


FOR EXTERNAL USE

After connect the field device wire of the ground to protect the signal.

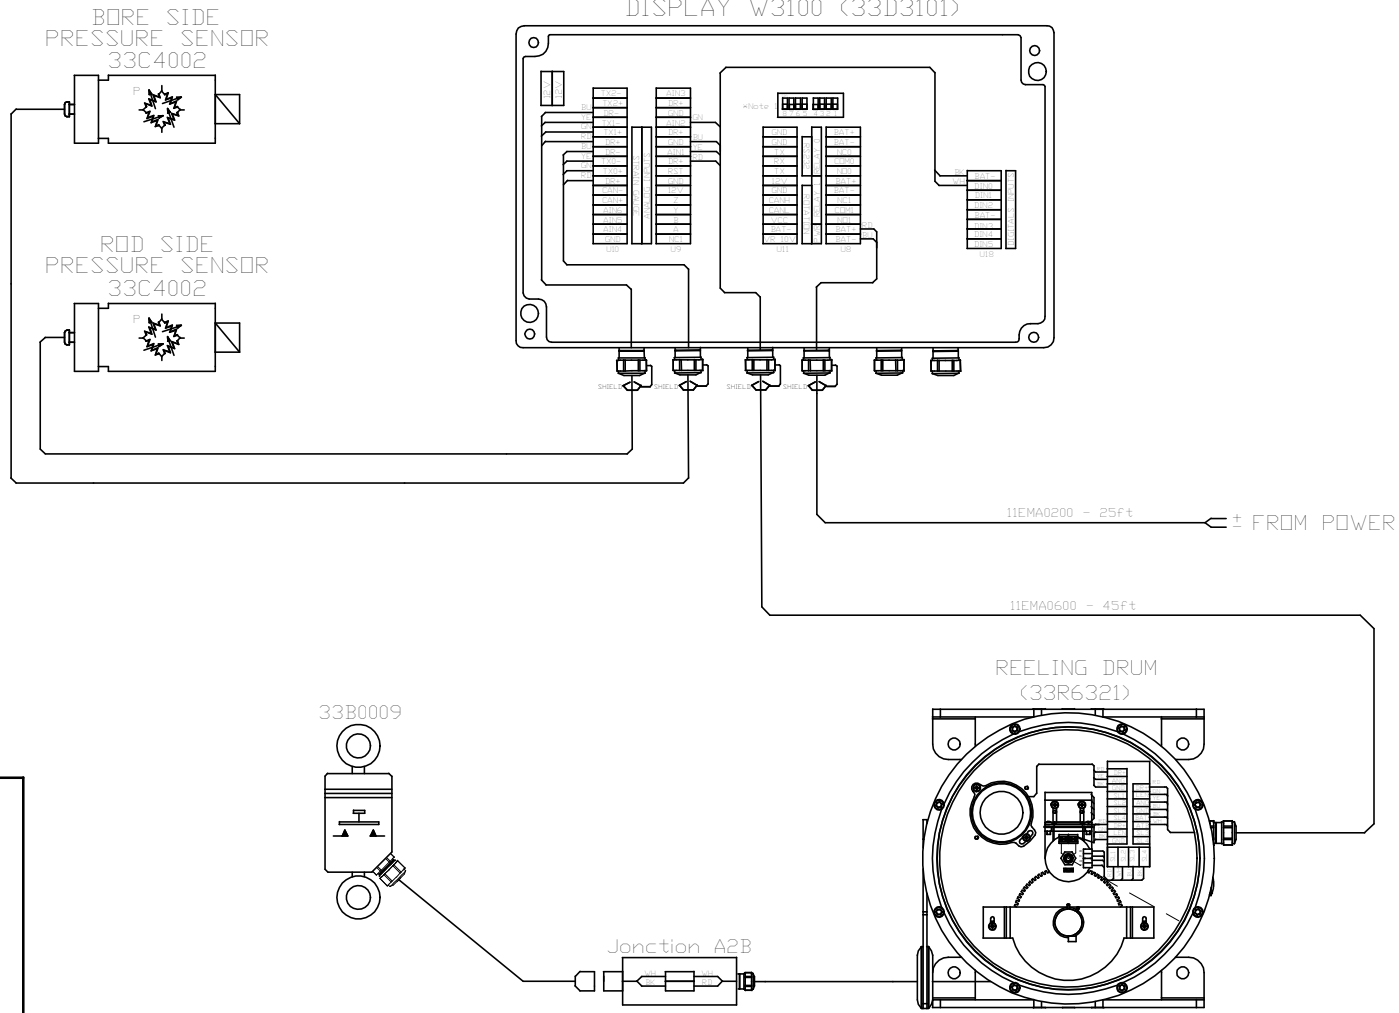

LEGEND

DIP SWITCH DESCRIPTION

Slot 1
 <--- DN TX0+ = 243 ohms
 <--- DN TX0- = Gnd
 <--- DN TX1+ = 243 ohms
 <--- DN TX1- = Gnd
 <--- DN TX2+ = 243 ohms
 <--- DN TX2- = Gnd
 Not Connected
 Not Connected
 <--- DN --->

Slot 2
 Calibration <--- OFF DN --->
 Not Connected
 Not Connected
 *Soft <--- Up Down --->
 <--- DN --->

VCC +5V Isolated
 I2V Isolated
 DR+ +5V Isolated
 DR- +5V Isolated
 VB+ +10V Not Isolated
 BAT+ Not Isolated
 BAT- Not Isolated